



## **METRO CERAMICS**

8-A, National Highway, Lakhdhirpur Road, Morbi 363 642, Gujarat, INDIA.

metrofloortiles@gmail.com | +91 99798 43682

www.metrowoodentiles.com












## 200x1400mm

THE MARKED CHARACTER OF ORIGINAL AND PRESTIGIOUS WOOD ESSENCES BREATHES NEW LIFE ON THE SURFACE OF EXTREMELY NATURAL AND ELEGANT PORCELAIN TILES, FOR INDOOR AND OUTDOOR AREAS WITH CUTTING EDGE DESIGN.

WITH A PLEASANT SENSE OF MOTION, THE SURFACE IS CHARACTERISED BY OUTSTANDING GRAPHIC DEPTH THAT EVOKES, WITH EXTRAORDINARY REALISM AND AUTHENTICITY, THE ALLURING DETAILS OF ORIGINAL PLANKS OF WOOD.

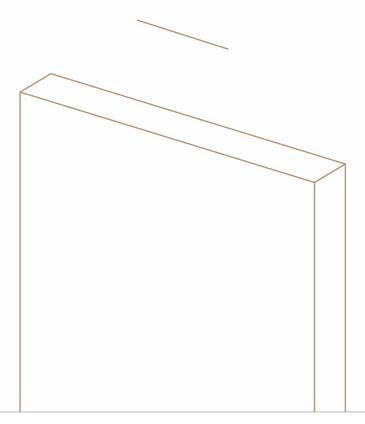

WE ARE BELIEVES IN INNOVATING PRODUCTS THAT SPLASH A WONDER OF EXCELLENCE AND ENORMITY IN TERMS OF INNOVATION AND A NOVEL APPROACH, LOOKING AT MODERN TIMES AND URBAN REQUIREMENTS. WITH CHANGING TIMES, THE NEED OF CUSTOMERS IS TOWARDS EASE OF USE, EASY MAINTENANCE, MODISH AND BOHEMIAN FEEL AND INVENTIVE DESIGNS, EACH DAY.

WITH GROWING COMPETITION, WE ARE BELIEVES IN BETTERING ITS OWN PRODUCTS ON A REGULAR BASIS. COMING UP WITH INGENIOUS WOODEN PLANKS TILING SOLUTIONS, THE FLOORS LOOK SLEEK AND SPLENDID. WITH AN EXQUISITE FEEL OF OPULENCE AND GRANDEUR, THE WOODEN PLANKS TILES GIVE A RICH FEEL OF LAVISHNESS AND LUXURY. BRING A VERVE OF DASHING IMPRESSION TO YOUR FLOORS, CHOOSING THESE MARVELOUS TILES THAT REVOLUTIONIZE THE WORLD OF FLOORING IN ITS OWN NOVEL WAY.

suitable for constant contact with water

stain resistant highly uv resistant resistance to freezing and thawing highly scratch resistant














200x1400mm LUXURIOUS WOODEN PLANKS

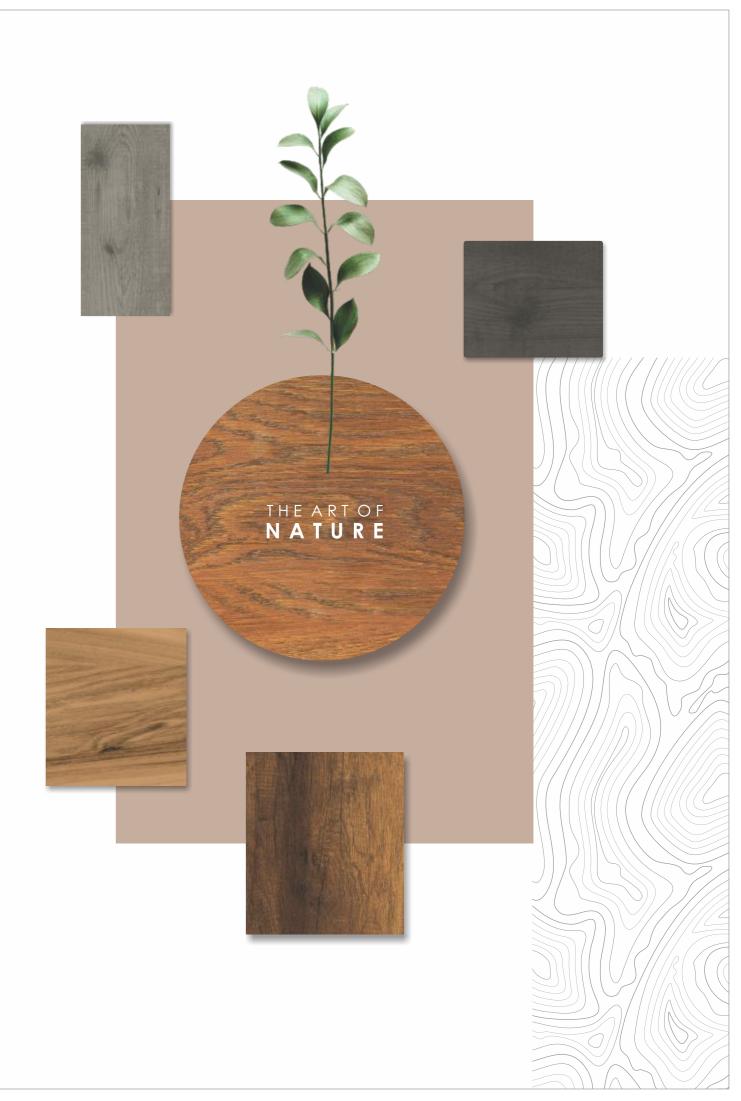













07









200x1400mm LUXURIOUS WOODEN PLANKS





09









10





11















13









200x1400mm LUXURIOUS WOODEN PLANKS






15







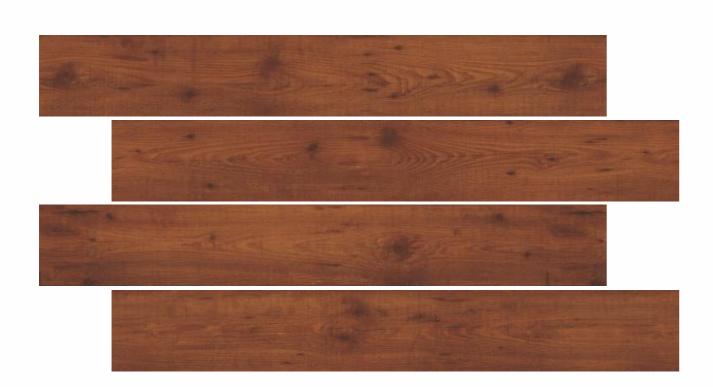

200x1400mm LUXURIOUS WOODEN PLANKS





THE HARMONY OF WOOD



 $\overline{17}$ 







200x1400mm LUXURIOUS WOODEN PLANKS





19















21













THE HARMONY OF WOOD




 $\overline{23}$ 









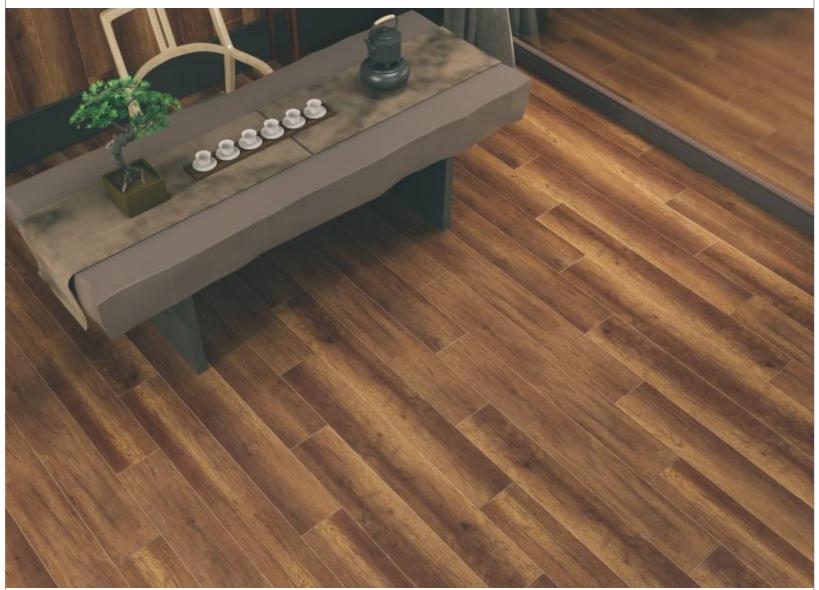



25









26



27












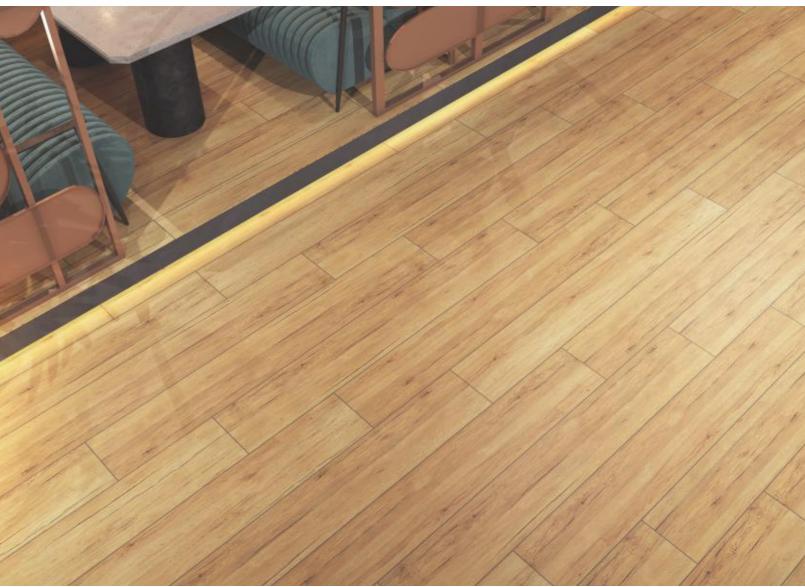



29










200x1400mm LUXURIOUS WOODEN PLANKS

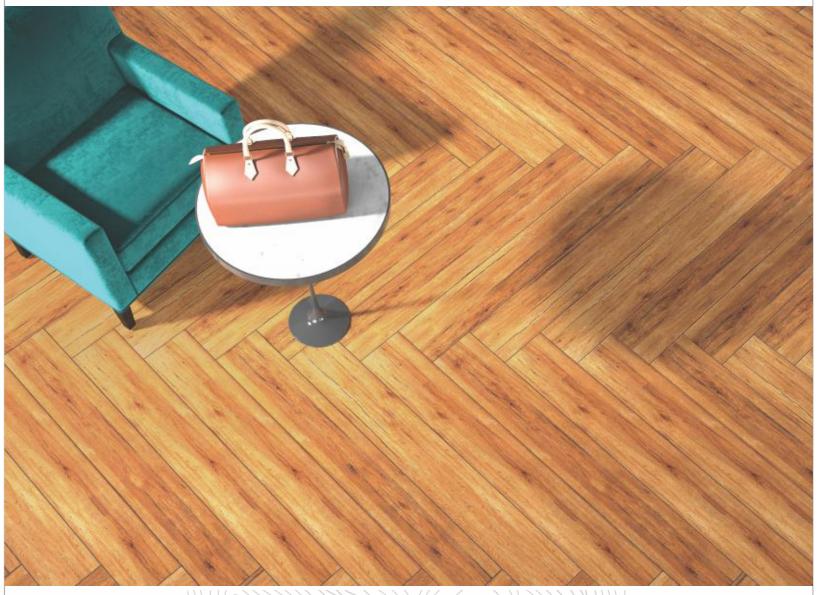



31









32





33









34





35









200x1400mm LUXURIOUS WOODEN PLANKS





37









38





39









200x1400mm LUXURIOUS WOODEN PLANKS





THE HARMONY OF WOOD




41









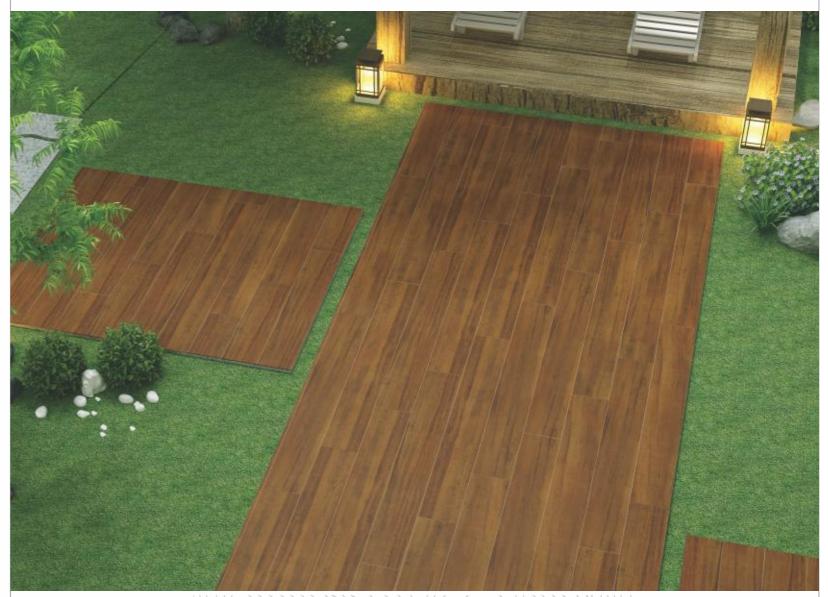



43













THE HARMONY OF WOOD



44













THE HARMONY OF WOOD



 $\overline{47}$ 







48





THE HARMONY OF WOOD



49

# PACKING DETAILS

Sr. No.	Size	No. of Tiles Per Box	Coverage Area in Sq. Feet	Approx. Weight / Box
1	200x1400mm	4	12.05 sq. ft.	24kgs.

DISCLAIMER: Wooden Tiles reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime, the colors shown of tiles in this catalogue are purely illustrative and limited to printing process, please refer actual sample before final selection, the details of sizes, colors, references should be verified for typographical errors.

## LAYING INSTRUCTIONS

#### TILES FIXING INSTRUCTIONS

- 1. All the tiles must be checked prior to fixing for quality, batch no. and choice.
- 2. Plaster the surface of the floor to be tiled and allow curing atleast two weeks before tiling.
- 3. While fixing pick tiles from various boxes alternatively, lay them in the desired patterns and make sure that they give an acceptable blend of colour and design. Please note that shade variation is inherent in manufacturing tiles.
- 4. For fixing tiles we recommend to use the fixing adhesives or equivalent product for the best result.
- 5. For fixing tiles in floor using conventional method, we suggest the following laying instruction:
- A: use cement and sand mortar in the ratio 1:4. Add water to create a consistent paste.
- B: Apply 20-25MM of bedding materials over the floor area of 1.0SQM at a time.
- C: Apply a thin coat of the slurry on the back of the tile to ensure proper and full bedding. Press gently for even adherence of the tiles with surface.
- Do not use any heavy materials like iron or hammer to press tile.
- 6: For fixing the tools on Dado, we recommend the use of adhesive or equivalent materials.
- 7: Allow 3-4 days of bed curing after laying tiles and later fill the joints with grout.
- 8: We recommend maintaining a joint gap of 1-2mm between the tiles to allow possible thermal expansion at later stage.
- 9: Please note that company will not accept any liability in case of any problems arising out of adherence of above fixing instructions.

**DISCLAIMER**: reserves the right to delete and amend either totally or partially, any of the colours, shapes, sizes, references and other technical specifications contained in the catalogue at any time. The colours shown in this catalogue are purely illustrative and limited to printing process. Please refer actual samples before final selection. The details of colours, sizes and references should be verified for photography errors. SHADE & SIZE VARIATIONS are inherent characteristics of ceramics. NO COMPLAINTS SHALL BE ENTERTAINED ON TILES ALREADY/FIXED.

#### NOTES:


- \* All technical specifications in this catalogue are for premium grade materials only.
- \* SHADE/SIZE VARIATION are inherent characteristics to ceramics. Certain products purposely have variations that are the parts of designs and process. The same have been indicated.
- \* It is recommended to blend tiles by mixing tiles from various boxes and check for natural hue before fixing.
- \* Company's liability is also limited to the material supplied by the company; no other claim is entertained under any circumstances.
- \* No complaints shall be entertained regarding the decoration on tiles.



https://youtu.be/RYpbBsyx0N


# TILES LAYING PATTERN 1/4

Tiles Size: 200x1400mm | 20x140cm

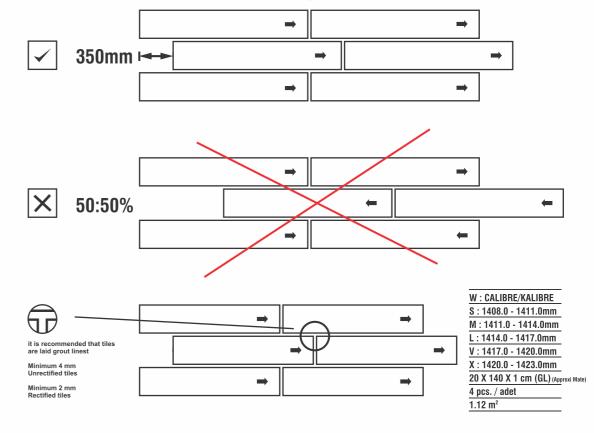

#### ARROW DIRECTION YOU COVERING

TILES MUST BE SETTLED CONSIDERING THE DIRECTION OF THE ARROW (†) ON THE BACK OF TILE.



### Helpful tips for better aesthetics look (Laying Instructions)

- 1. For better aesthetic value and for long term use, it is strongly recommended to provide 3 mm spacer in between the tiles. Without spacer, harmony of tiles might be disturbed.
- $2.\,\mathrm{Make}$  sure that the design, pattern and the arrow marked on the back side of tiles must be in the same direction.
- 3. Any product from digitile must be installed (laid) in the same format. For the particular series customized size application is not possible.
- \* THE COMPANY SHALL NOT BEAR ANY LIABILITY FOR THE PROBLEMS OUT OF NON-FULFILLMENT OF LAYING THE INSTRUCTIONS AS ABOVE.