



METRO[®]
ARTE CERAMICA

200x1400mm
ORIGINAL MOULDED WOODEN TILES

WHAT'S ORIGINAL MOULD TILE?

मूल मोल्ड टाइल क्या है?

IN THE PAST, THERE ARE 2 KINDS OF TILE: **RECTIFIED TILE** AND **ORIGINAL MOULD TILE**.
अतीत में, 2 प्रकार की टाइलें होती हैं: संशोधित टाइल और मूल मोल्ड टाइल।

WHAT'S
THE
DIFFERENCES




1

RECTIFIED TILE

FACTORY PRODUCED THE BIGGER SIZE WOOD TILE FIRST,
THEN CUT INTO THE RIGHT SIZE.

FOR **20X120CM** EXAMPLE, IT IS CUTTED FROM **60X120CM**

फैक्ट्री ने पहले बड़े आकार की टाइल का उत्पादन किया,
फिर सही आकार में काट लें।
20X120CM उदाहरण के लिए, इसे 60X120CM . से काटा गया है

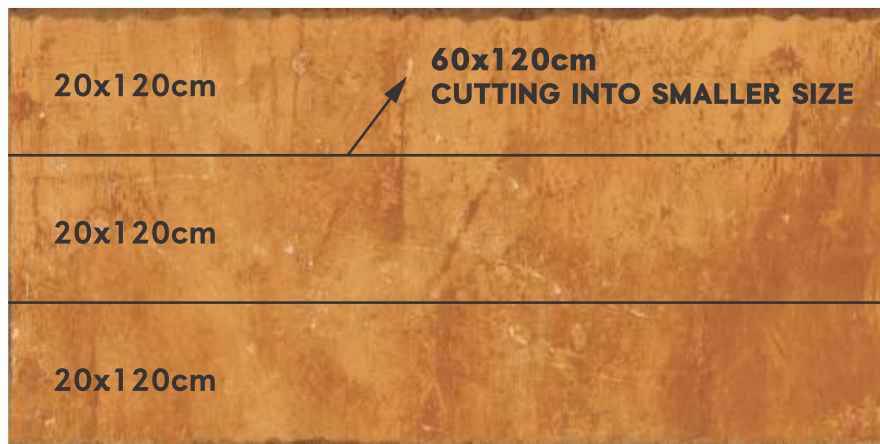

2


ORIGINAL MOULD TILE

TRADITIONAL RECTIFIED TILES IS CUTTING FROM BIG SIZE,
IT IS EASY TO BEND.

BUT THE ORIGINAL MOULD TILE WILL NOT.

पारंपरिक सुधारित टाइलें बड़े आकार से कट रही हैं,
झुकना आसान है।

लेकिन मूल मोल्ड टाइल नहीं होगी।

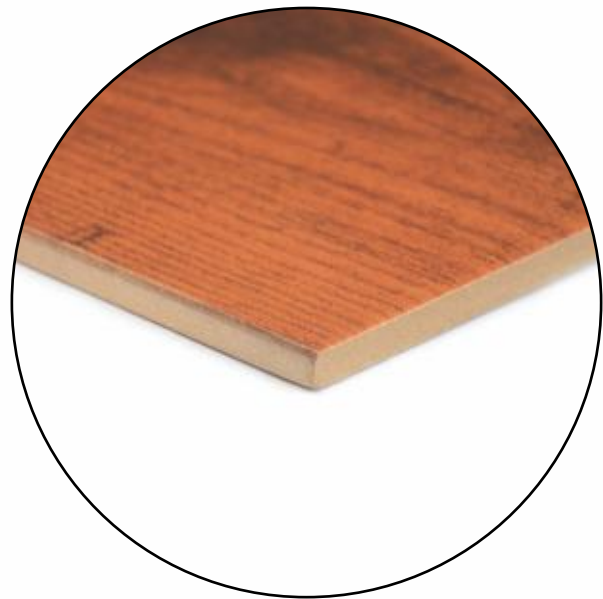

WHY ORIGINAL MOULD TILE MUCH BETTER





क्यों है मूल मोल्ड टाइल काफी बेहतर ?

1

SOLVE BEND DEFECT, HIGH HARDNESS
NEW TECHNOLOGY, ADVANCED EQUIPMENTS


बेंड दोष को हल करें, उच्च कठोरता
नई टेक्नोलॉजी, उन्नत उपकरण

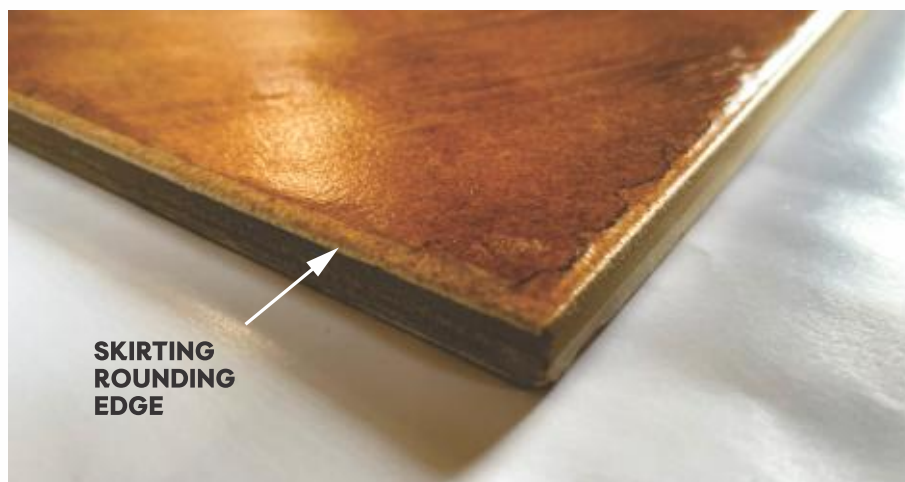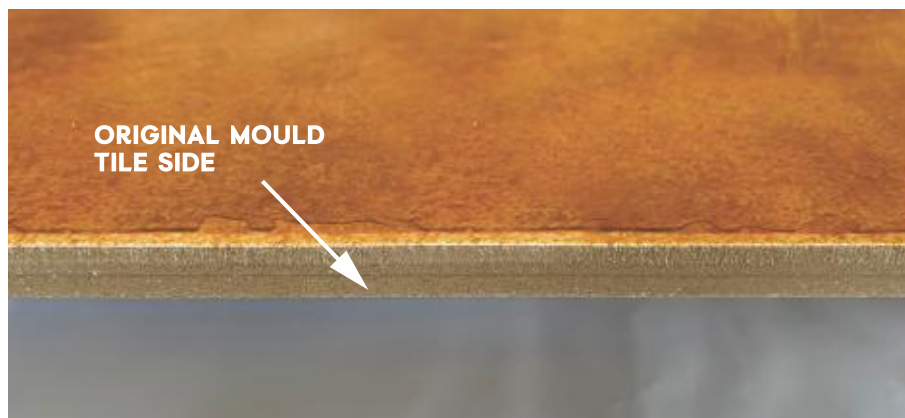

2


STRAIGHT, BEND
DEFECT SOLVED.

सीधा, झुकना दोष हल किया।

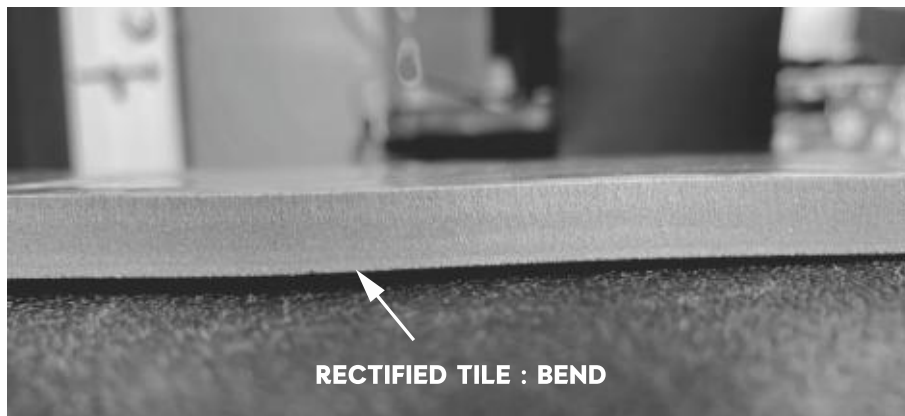

 **METRO**[®]
ARTE CERAMICA

200 x 1400 mm

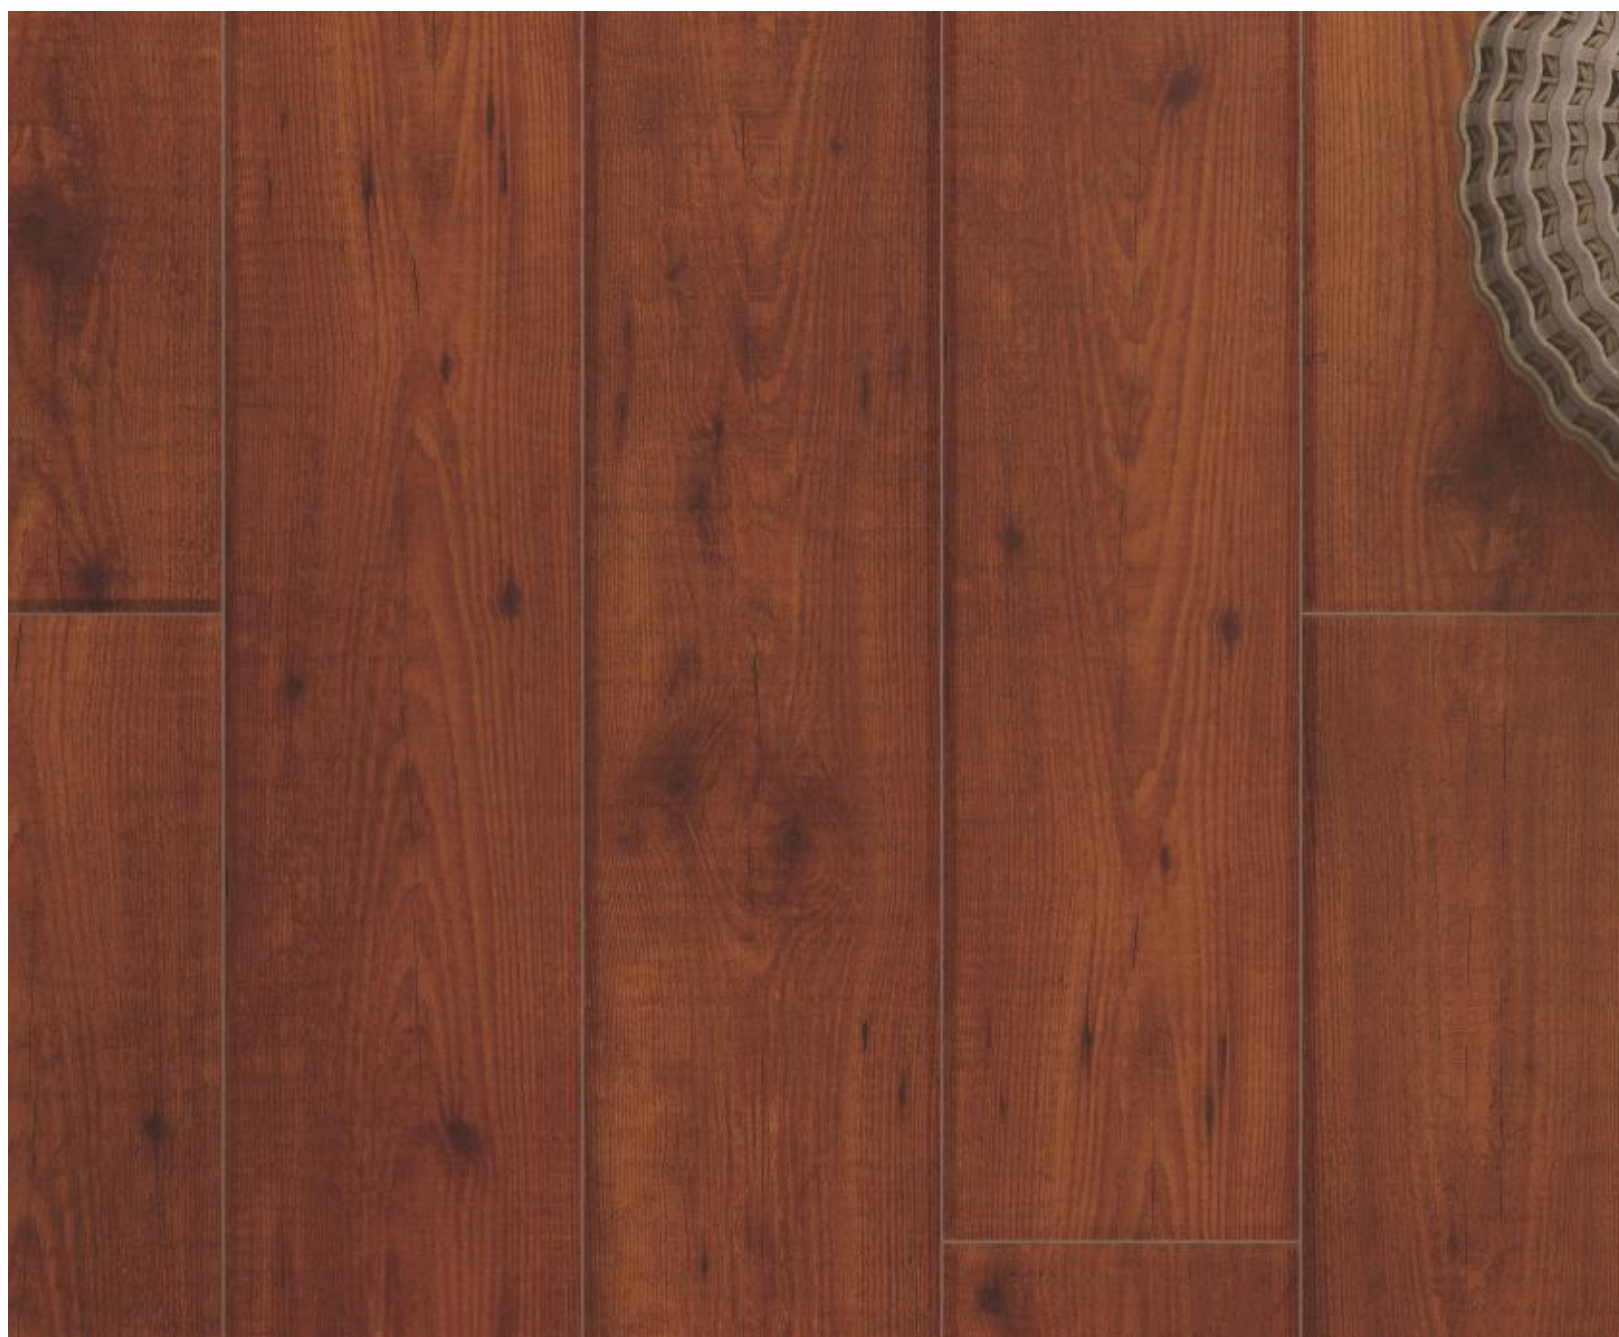

200X
1400MM
SIZE
ORIGINAL
MOULD
TILES




NR
142001

THE ELEGANCE OF WOOD

200x1400mm




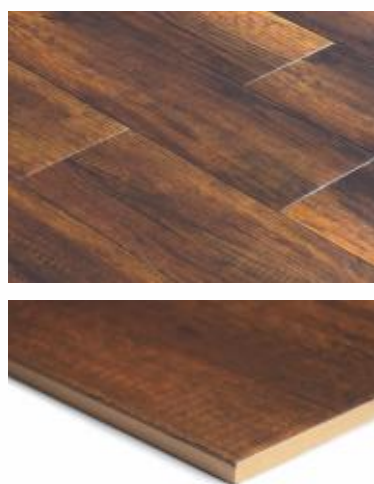

200x1400mm

NR
142001


THE ELEGANCE OF WOOD



NR
142002

THE ELEGANCE OF WOOD

200x1400mm

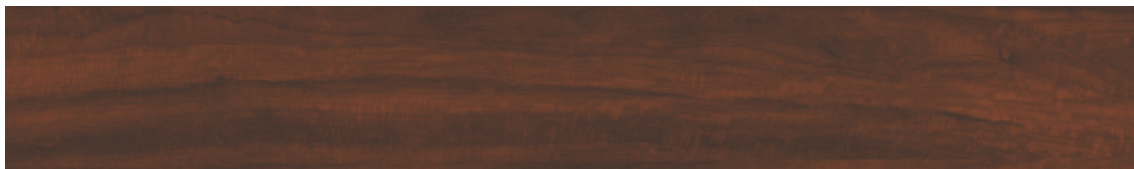



200x1400mm

NR
142002

THE ELEGANCE OF WOOD



NR
142003

THE ELEGANCE OF WOOD

200x1400mm





200x1400mm

NR
142003

THE ELEGANCE OF WOOD



NR
142004

THE ELEGANCE OF WOOD

200x1400mm





200x1400mm

NR
142004

THE ELEGANCE OF WOOD



NR
142005

THE ELEGANCE OF WOOD

200x1400mm





200x1400mm

NR
142005

THE ELEGANCE OF WOOD



NR
142006

THE ELEGANCE OF WOOD

200x1400mm






200x1400mm

NR
142006

THE ELEGANCE OF WOOD



NR
142007

THE ELEGANCE OF WOOD

200x1400mm





200x1400mm

NR
142007

THE ELEGANCE OF WOOD



NR
142008

THE ELEGANCE OF WOOD

200x1400mm





200x1400mm

NR
142008


THE ELEGANCE OF WOOD



NR
142009

THE ELEGANCE OF WOOD

200x1400mm

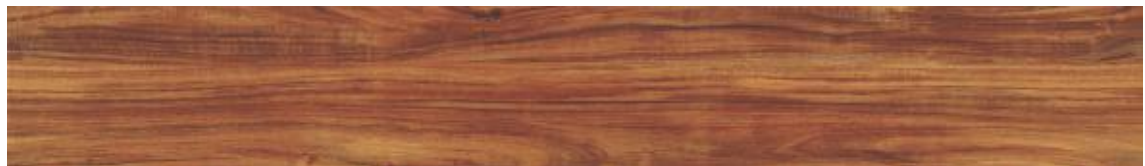



200x1400mm

NR
142009

THE ELEGANCE OF WOOD



NR
142010

THE ELEGANCE OF WOOD

200x1400mm





200x1400mm

NR
142010



THE ELEGANCE OF WOOD



NR
142011

THE ELEGANCE OF WOOD

200x1400mm

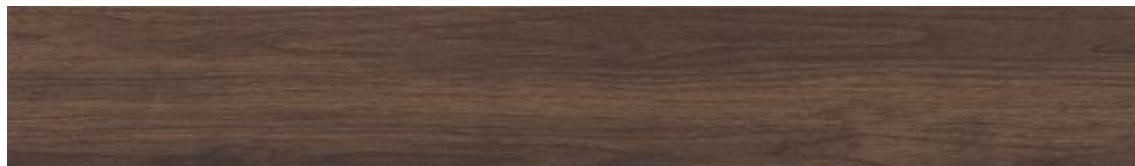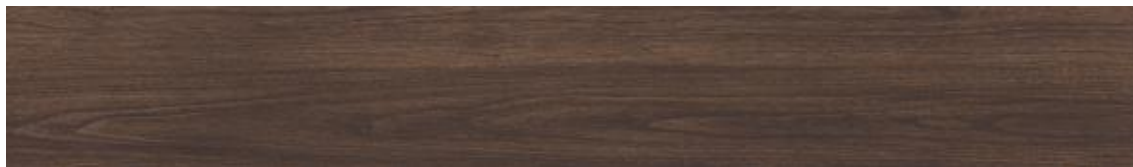



200x1400mm

NR
142011


THE ELEGANCE OF WOOD



NR
142012

THE ELEGANCE OF WOOD

200x1400mm

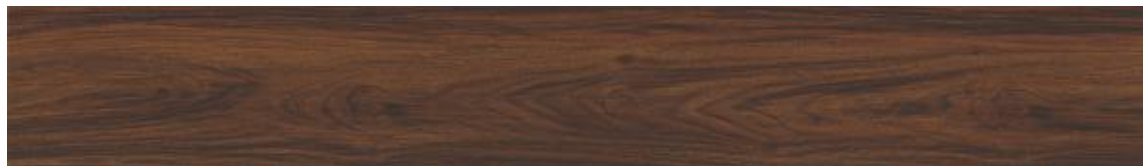



200x1400mm

NR
142012

THE ELEGANCE OF WOOD



PACKING DETAILS

Sr. No.	Size	No. of Tiles Per Box	Coverage Area in Sq. Feet	Approx. Weight / Box
1	200x1400mm	4	12.05 sq. ft.	24kgs.

DISCLAIMER: Wooden Tiles reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime, the colors shown of tiles in this catalogue are purely illustrative and limited to printing process, please refer actual sample before final selection, the details of sizes, colors, references should be verified for typographical errors.

LAYING INSTRUCTIONS


TILES FIXING INSTRUCTIONS

1. All the tiles must be checked prior to fixing for quality, batch no. and choice.
2. Plaster the surface of the floor to be tiled and allow curing atleast two weeks before tiling.
3. While fixing pick tiles from various boxes alternatively, lay them in the desired patterns and make sure that they give an acceptable blend of colour and design. Please note that shade variation is inherent in manufacturing tiles.
4. For fixing tiles we recommend to use the fixing adhesives or equivalent product for the best result.
5. For fixing tiles in floor using conventional method, we suggest the following laying instruction:
A: use cement and sand mortar in the ratio 1:4. Add water to create a consistent paste.
B: Apply 20-25MM of bedding materials over the floor area of 1.0SQM at a time.
C: Apply a thin coat of the slurry on the back of the tile to ensure proper and full bedding. Press gently for even adherence of the tiles with surface.
Do not use any heavy materials like iron or hammer to press tile.
- 6: For fixing the tools on Dado, we recommend the use of adhesive or equivalent materials.
- 7: Allow 3-4 days of bed curing after laying tiles and later fill the joints with grout.
- 8: We recommend maintaining a joint gap of 1-2mm between the tiles to allow possible thermal expansion at later stage.
- 9: Please note that company will not accept any liability in case of any problems arising out of adherence of above fixing instructions.

DISCLAIMER : reserves the right to delete and amend either totally or partially, any of the colours, shapes, sizes, references and other technical specifications contained in the catalogue at any time. The colours shown in this catalogue are purely illustrative and limited to printing process. Please refer actual samples before final selection. The details of colours, sizes and references should be verified for photography errors. SHADE & SIZE VARIATIONS are inherent characteristics of ceramics. NO COMPLAINTS SHALL BE ENTERTAINED ON TILES ALREADY/FIXED.

NOTES :

- * All technical specifications in this catalogue are for premium grade materials only.
- * SHADE/SIZE VARIATION are inherent characteristics to ceramics. Certain products purposely have variations that are the parts of designs and process. The same have been indicated.
- * It is recommended to blend tiles by mixing tiles from various boxes and check for natural hue before fixing.
- * Company's liability is also limited to the material supplied by the company; no other claim is entertained under any circumstances.
- * No complaints shall be entertained regarding the decoration on tiles.




<https://youtu.be/RYpbBsyx0MU>

TILES LAYING PATTERN 1/4


Tiles Size: 200x1400mm | 20x140cm



350mm

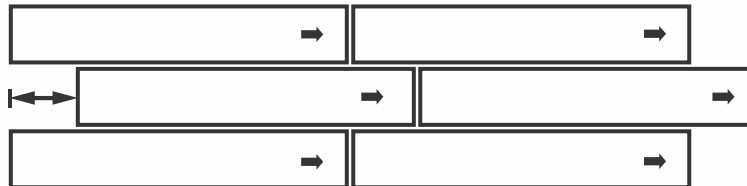


50:50%

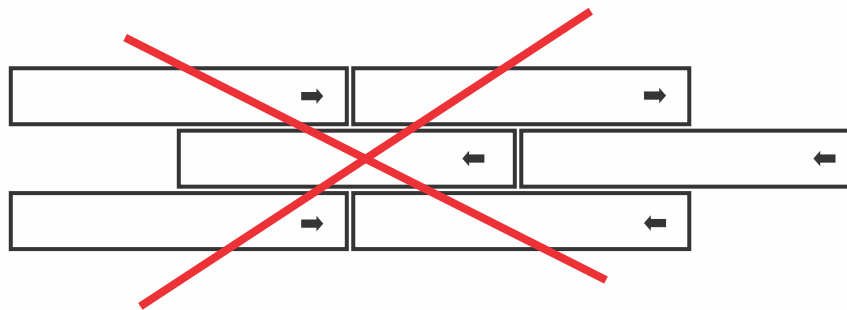

it is recommended that tiles are laid grout lines

Minimum 4 mm
Unrectified tiles

Minimum 2 mm
Rectified tiles

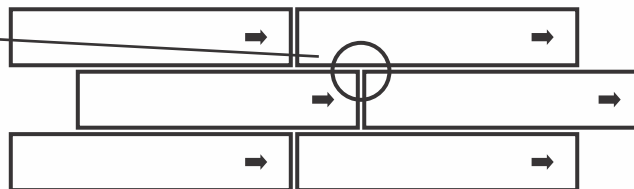

W : CALIBRE/KALIBRE

S : 1408.0 - 1411.0mm

M : 1411.0 - 1414.0mm

L : 1414.0 - 1417.0mm

V : 1417.0 - 1420.0mm

X : 1420.0 - 1423.0mm


20 X 140 X 1 cm (GL) (Approx. Male)

4 pcs. / adet

1.12 m²

ARROW DIRECTION YOU COVERING

TILES MUST BE SETTLED CONSIDERING THE DIRECTION OF THE ARROW (➔) ON THE BACK OF TILE.



Helpful tips for better aesthetics look (Laying Instructions)

1. For better aesthetic value and for long term use, it is strongly recommended to provide 3 mm spacer in between the tiles. Without spacer, harmony of tiles might be disturbed.

2. Make sure that the design, pattern and the arrow marked on the back side of tiles must be in the same direction.

3. Any product from digitile must be installed (laid) in the same format. For the particular series customized size application is not possible.

* THE COMPANY SHALL NOT BEAR ANY LIABILITY FOR THE PROBLEMS OUT OF NON-FULFILLMENT OF LAYING THE INSTRUCTIONS AS ABOVE.



METRO CERAMICS

8-A, National Highway, Lakhdirpur Road,
Morbi 363 642, Gujarat, INDIA.

metrofloortiles@gmail.com | +91 99798 43682

www.metrowoodentiles.com