

# TILES LAYING INSTRUCTIONS

---

## PRODUCT INFORMATION



<b>Hs Code</b>	<b>69072200</b>
<b>Size</b>	<b>15X90CM, 20X100CM, 20X120CM, 20X140CM</b>
<b>Material</b>	<b>Ceramic Floor Tiles</b>
<b>Surface Treatment</b>	<b>Glazed Tiles</b>
<b>Tile Type</b>	<b>Floor &amp; Wall</b>
<b>Thickness</b>	<b>9 to 9.5 MM</b>
<b>Water Absorption</b>	<b>6-8% ( B (II) b Body )</b>
<b>MOR</b>	<b>280-300 KG/CM<sup>2</sup></b>

## PACKING DETAILS

Sr. No.	SIZE	PER BOX				PER PALLET		PER CONTAINER - 20' FCL			
	MM	PCS.	SQ. FT.	SQ. MTR.	WEIGHT	BOX	SQ. MTR.	TOTAL BOX	PALLETS	SQ. MTR.	WEIGHT / Cont.
1	150x900 MM (MOULD)	8	11.62	1.08	22 KG (Approx)	60	64.8	1260	21	1360.8	28 Ton (Approx)
2	200x1000 MM (MOULD)	5	10.76	1	20 KG (Approx)	57	57	1368	24	1368	28 Ton (Approx)
3	200x1200 MM (MOULD)	5	12.91	1.20	25 KG (Approx)	42	50.82	1092	26	1321.32	28 Ton (Approx)
4	200x1400 MM (MOULD)	4	12.05	1.12	23 KG (Approx)	45	47.7	1170	26	1310.4	28 Ton (Approx)








ONE OF THE  
LARGEST  
MANUFACTURERS  
OF **WOODEN TILES**  
BY **MOULD**



WOODEN PLANK  
TILES

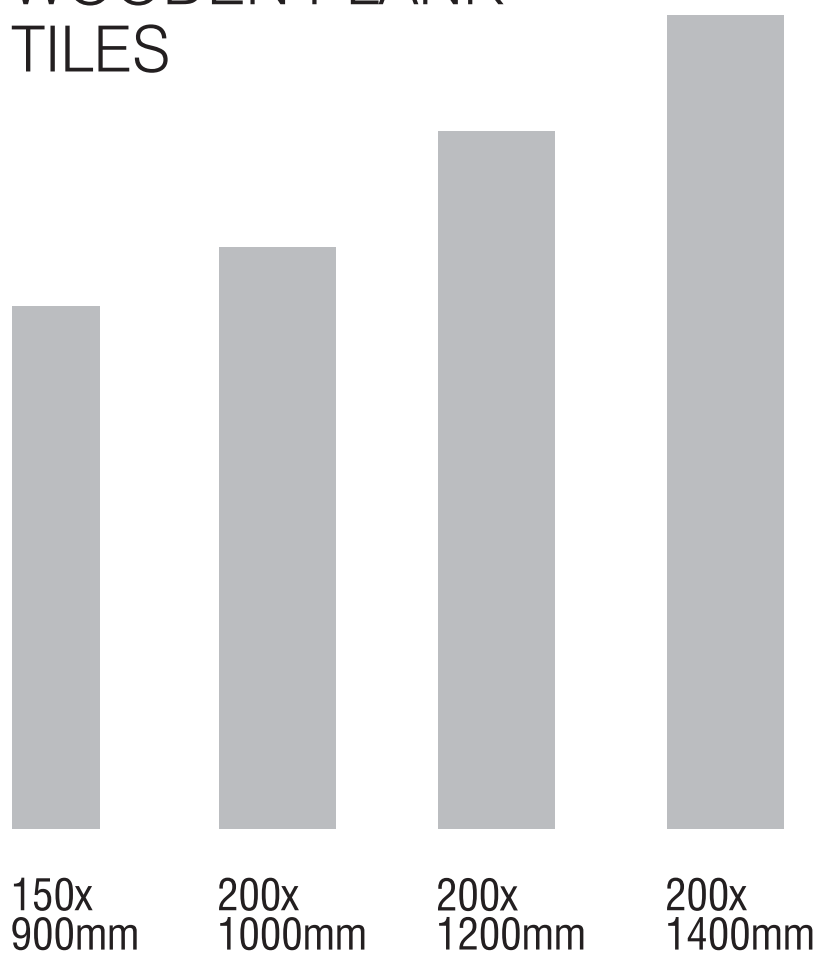

# HOW TO LAY WOOD-LOOK TILES

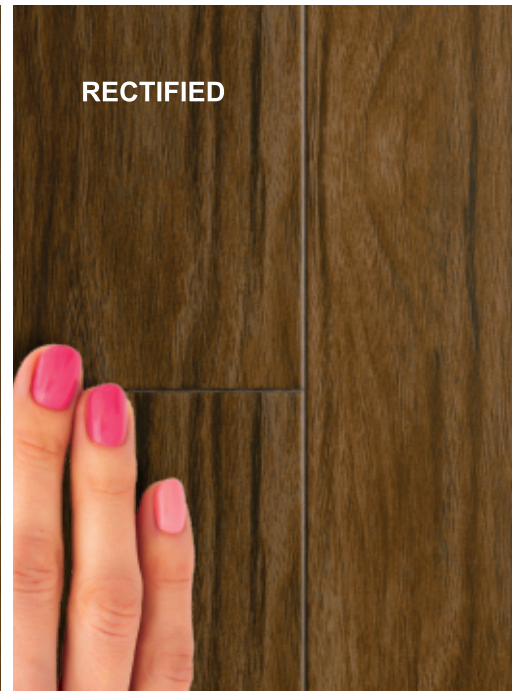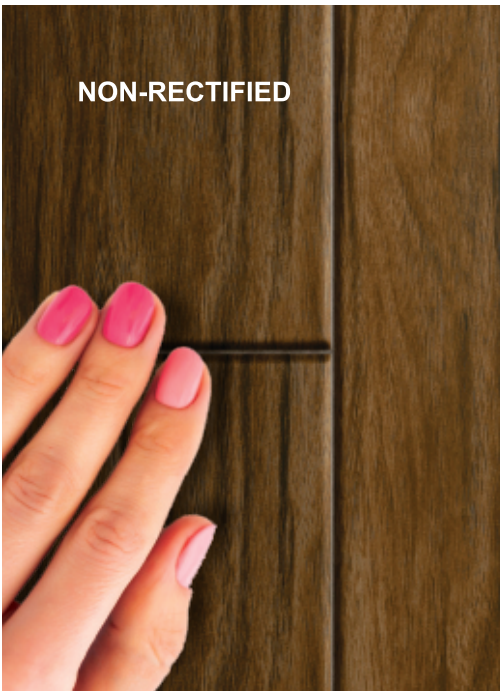




## SUB: TILES LAYING INSTRUCTIONS


### STEP -1

Open the tiles Box

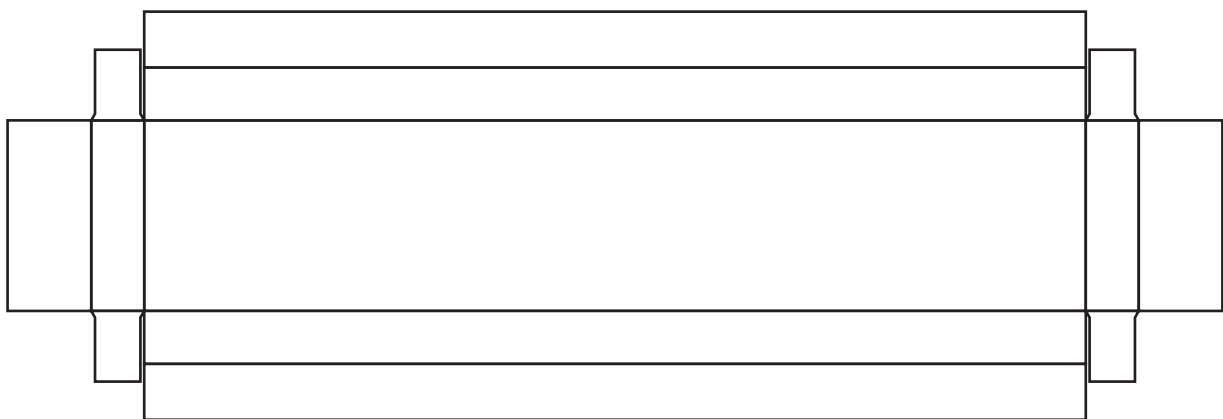

### STEP -2

**TILES MUST BE SETTLED CONSIDERING THE DIRECTION OF THE ARROW (→) ON THE BACK OF TILE.**

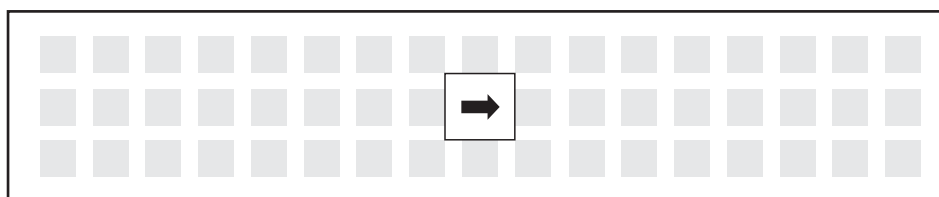



# SUB: TILES LAYING INSTRUCTIONS

## STEP - 3


Laying the Tiles

### TILES LAYING PATTERN 1/4


Tiles Size: 200x1400mm | 20x140cm



350mm

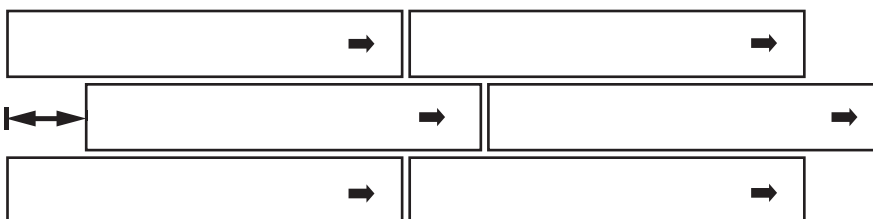


50:50%

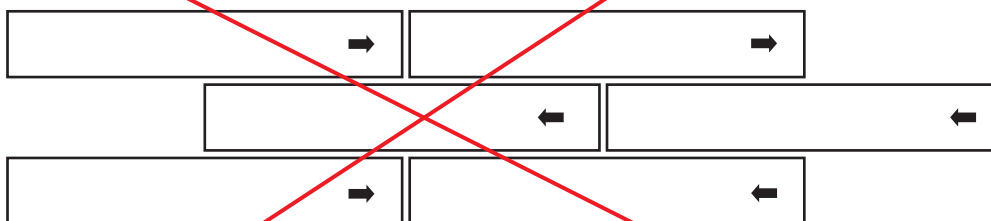

it is recommended that tiles are laid grout linest

Minimum 4 mm  
Unrectified tiles

Minimum 2 mm  
Rectified tiles

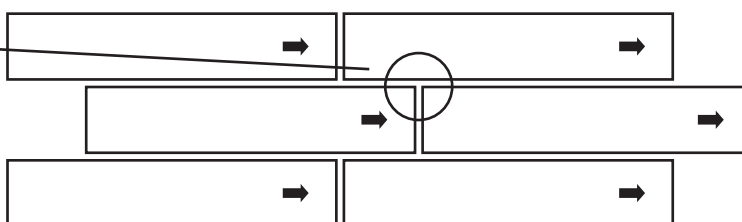

CALIBER DETAIL IS HERE ON BOX

W : CALIBRE/KALIBRE  
S : 1408.0 - 1411.0mm  
M : 1411.0 - 1414.0mm  
L : 1414.0 - 1417.0mm  
V : 1417.0 - 1420.0mm  
X : 1420.0 - 1423.0mm  
20 X 140 X 1 cm (GL) (Approximate)  
4 pcs. / adet  
1.12 m<sup>2</sup>



# SUB: TILES LAYING INSTRUCTIONS

## STEP - 3


Laying the Tiles

### TILES LAYING PATTERN 1/4


Tiles Size: 200x1200mm | 20x120cm



300mm

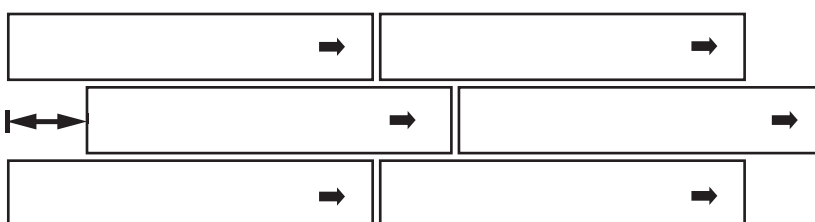


50:50%

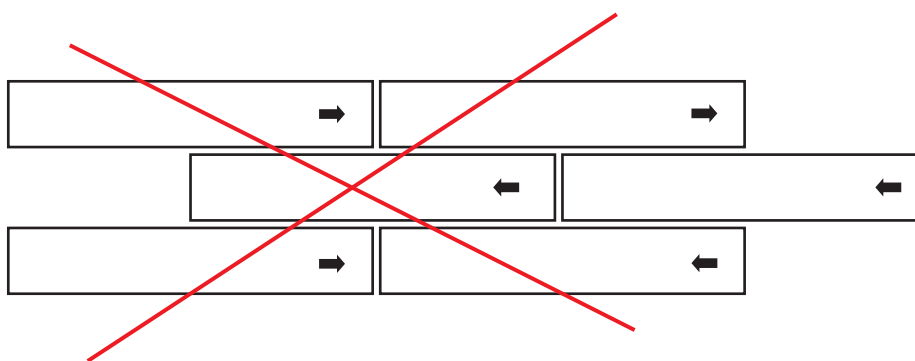

it is recommended that tiles are laid grout lines

Minimum 4 mm  
Unrectified tiles

Minimum 2 mm  
Rectified tiles

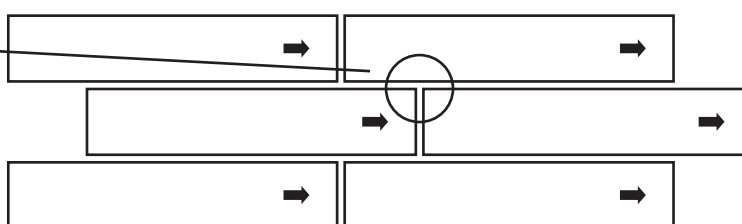

CALIBER DETAIL IS HERE ON BOX

W : CALIBRE/KALIBRE  
S : 1207.0 - 1209.0mm  
Y : 1209.0 - 1211.0mm  
X : 1211.0 - 1213.0mm  
A : 1213.0 - 1215.0mm  
V : 1215.0 - 1217.0mm  
20 X 120 X 1 cm (GL) (Approximate)  
5 pcs. / adet  
1.20 m<sup>2</sup>



# SUB: TILES LAYING INSTRUCTIONS

## STEP - 3


Laying the Tiles

### TILES LAYING PATTERN 1/4


Tiles Size: 200x1000mm | 20x100cm



250mm

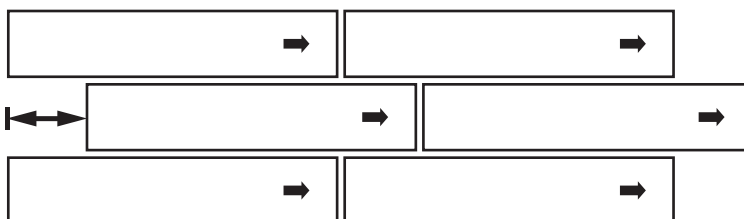



50:50%

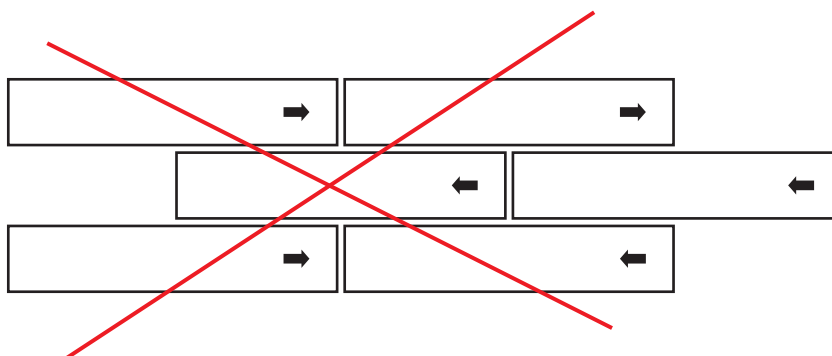

it is recommended that tiles are laid grout first

Minimum 4 mm  
Unrectified tiles

Minimum 2 mm  
Rectified tiles

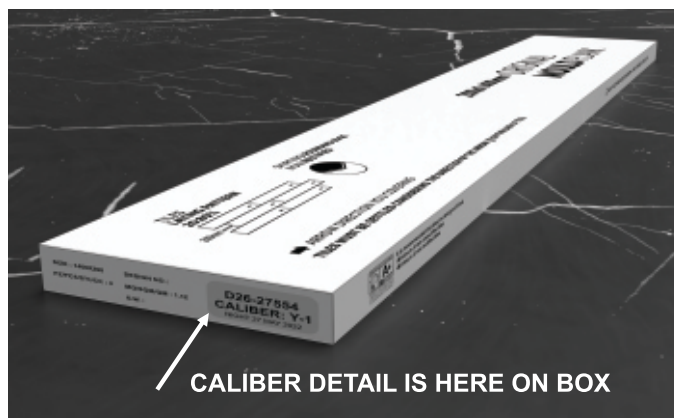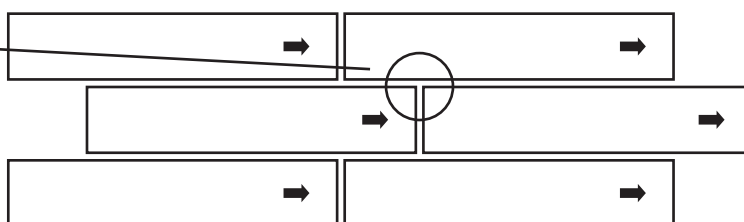

CALIBER DETAIL IS HERE ON BOX

W : CALIBRE/KALIBRE
S : 1003.0 - 1005.0mm
Y : 1005.0 - 1007.0mm
X : 1007.0 - 1009.0mm
A : 1009.0 - 1011.0mm
V : 1011.0 - 1013.0mm
L : 1013.0 - 1015.0mm
20 X 100 X 1 cm (GL) (Approximate)
5 pcs. / adet
1.0 m <sup>2</sup>








## SUB: TILES LAYING INSTRUCTIONS

### STEP - 3

Laying the Tiles

### TILES LAYING PATTERN 1/4


Tiles Size: 150x900mm | 15x90cm

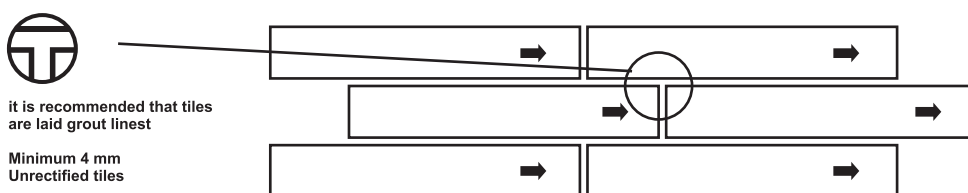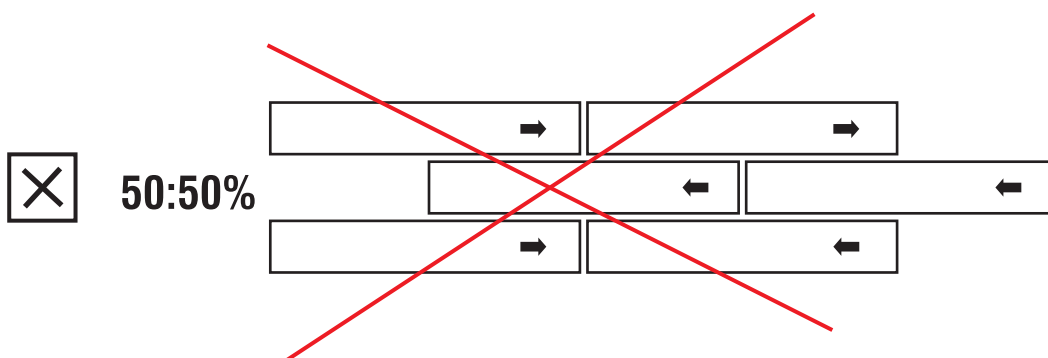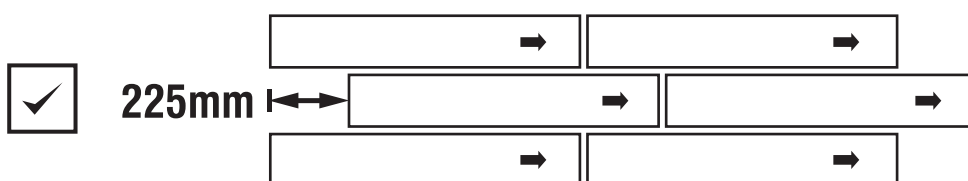

it is recommended that tiles are laid grout first


Minimum 4 mm  
Unrectified tiles

Minimum 2 mm  
Rectified tiles

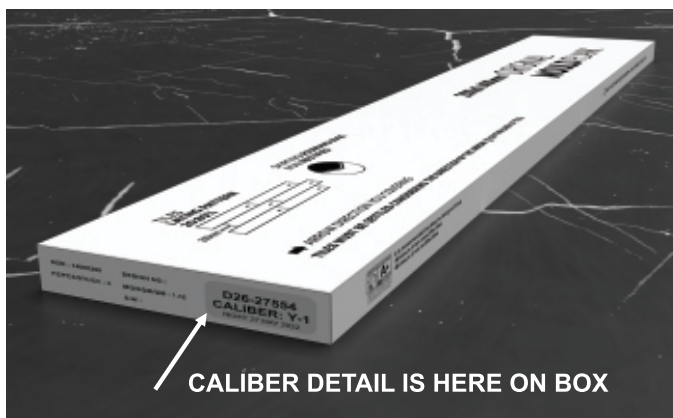

CALIBER DETAIL IS HERE ON BOX

W : CALIBRE/KALIBRE  
S : 903.0 - 905.0mm  
Y : 905.0 - 907.0mm  
X : 907.0 - 909.0mm  
A : 909.0 - 911.0mm  
15 X 90 X 0.90 cm (GL) (Approximate)  
8 pcs. / adet  
1.08 m<sup>2</sup>

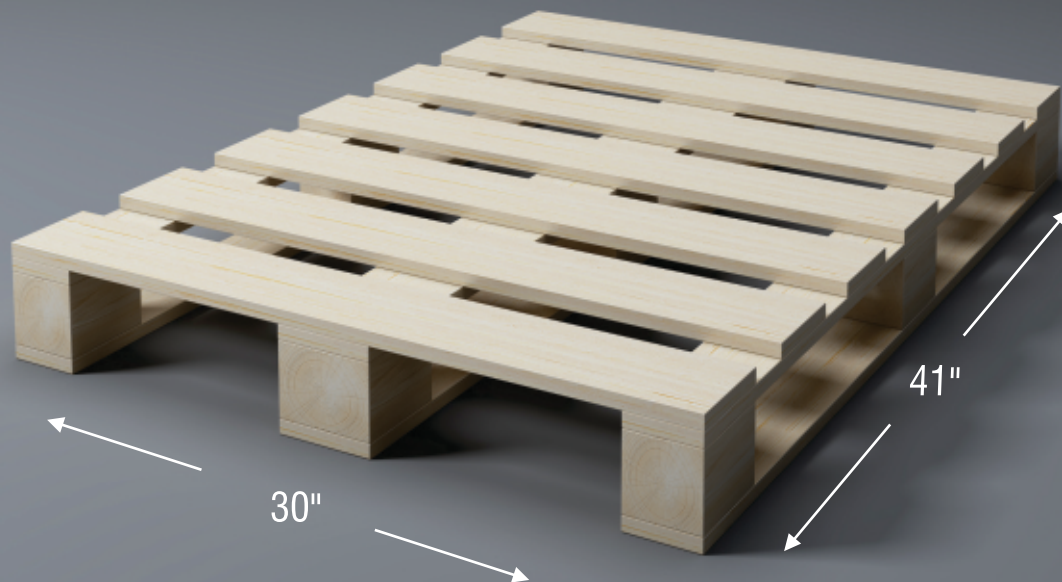


## PALLET INFORMATION

SIZE	PALLET SIZE (INCH)
150 x 900 mm ( 6"x36")	36" x 44"
200 x 1000 mm ( 8"x40")	40.5" x 40.5"   30" x 41"   36" x 41"
200 x 1200 mm ( 8"x48")	30" x 49"
200 x 1400 mm ( 8"x56")	30" x 57"



Scan for  
Laying  
Instructions  
Video



 <https://youtu.be/RYpbBsyx0MU>

## LAYING INSTRUCTIONS

### TILES FIXING INSTRUCTIONS

1. All the tiles must be checked prior to fixing for quality, batch no. and choice.
  2. Plaster the surface of the floor to be tiled and allow curing atleast two weeks before tiling.
  3. While fixing pick tiles from various boxes alternatively, lay them in the desired patterns and make sure that they give an acceptable blend of colour and design. Please note that shade variation is inherent in manufacturing tiles.
  4. For fixing tiles we recommend to use the fixing adhesives or equivalent product for the best result.
  5. For fixing tiles in floor using conventional method, we suggest the following laying instruction:  
A: use cement and sand mortar in the ratio 1:4. Add water to create a consistent paste.  
B: Apply 20-25MM of bedding materials over the floor area of 1.0SQM at a time.  
C: Apply a thin coat of the slurry on the back of the tile to ensure proper and full bedding. Press gently for even adherence of the tiles with surface.
- Do not use any heavy materials like iron or hammer to press tile.
- 6: For fixing the tools on Dado, we recommend the use of adhesive or equivalent materials.
  - 7: Allow 3-4 days of bed curing after laying tiles and later fill the joints with grout.
  - 8: We recommend maintaining a joint gap of 1-2mm between the tiles to allow possible thermal expansion at later stage.
  - 9: Please note that company will not accept any liability in case of any problems arising out of adherence of above fixing instructions.

**DISCLAIMER :** reserves the right to delete and amend either totally or partially, any of the colours, shapes, sizes, references and other technical specifications contained in the catalogue at any time. The colours shown in this catalogue are purely illustrative and limited to printing process. Please refer actual samples before final selection. The details of colours, sizes and references should be verified for photography errors. SHADE & SIZE VARIATIONS are inherent characteristics of ceramics. NO COMPLAINTS SHALL BE ENTERTAINED ON TILES ALREADY/FIXED.

### NOTES :

- \* All technical specifications in this catalogue are for premium grade materials only.
- \* SHADE/SIZE VARIATION are inherent characteristics to ceramics. Certain products purposely have variations that are the parts of designs and process. The same have been indicated.
- \* It is recommended to blend tiles by mixing tiles from various boxes and check for natural hue before fixing.
- \* Company's liability is also limited to the material supplied by the company; no other claim is entertained under any circumstances.
- \* No complaints shall be entertained regarding the decoration on tiles.

### Helpful tips for better aesthetics look (Laying Instructions)

1. For better aesthetic value and for long term use, it is strongly recommended to provide 3 mm spacer in between the tiles. Without spacer, harmony of tiles might be disturbed.
  2. Make sure that the design, pattern and the arrow marked on the back side of tiles must be in the same direction.
  3. Any product from digitile must be installed (laid) in the same format. i.e. 200x1000mm size. For the particular series customized size application is not possible.
- \* THE COMPANY SHALL NOT BEAR ANY LIABILITY FOR THE PROBLEMS OUT OF NON-FULFILLMENT OF LAYING THE INSTRUCTIONS AS ABOVE.



**METRO CERAMICS**

8-A, National Highway, Lakhdirpur Road,  
Morbi - 363 642 (Gujarat) INDIA.

---

**[www.metrowoodentiles.com](http://www.metrowoodentiles.com)**

follow us:   [metrowoodentile](#)

**Contact:**

Export : +91 88663 05646  
Domestic: +91 99798 43259